

Power Transformer

32/40MVA 33/11kV
ONAN/ONAF

www.hctr.co.kr

HAN CHANG

32/40MVA 33/11KV ONAN/ONAF
POWER TRANSFORMER

SPECIFICATION

Service area	Outdoor
Applicable standard	IEC 60076
Final paint color	Munsell No.5Y 7/1
Insulating oil	Mineral
Rated capacity	32 / 40 MVA
Phase/Rated frequency	3 / 50
Rated voltage HV/LV	33 kV / 11 kV
Tap voltage	HV : 33kV \pm 8 x 1.25%
Tap changing method	OLTC
Connection or polarity	YNd1
Cooling method	ONAN/ONAF
Sound level	73 / 74 dB



Features

Removable Radoators
Strength Tank
Best Design for all fact
Minimize current loss

HAN CHANG

32/40MVA 33/11KV ONAN/ONAF POWER TRANSFORMER

SIZE




Length	7100 mm
Width	5700 mm
Height	5000 mm

WEIGHT

Oil	19400 liter
Tank	50430 kG
Total	67100 kG

IN TANK

OUT LINE

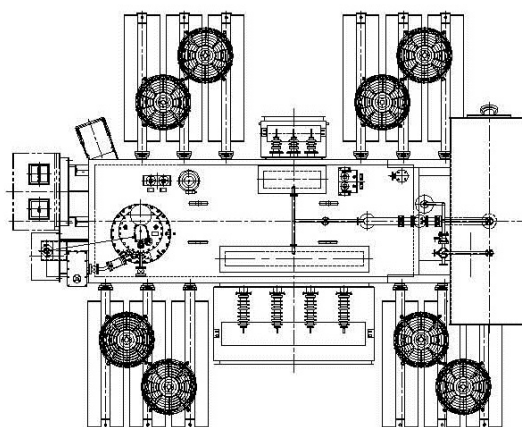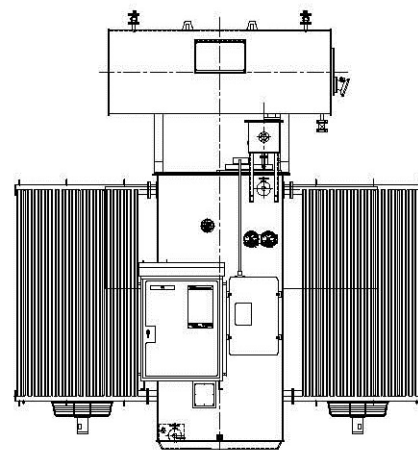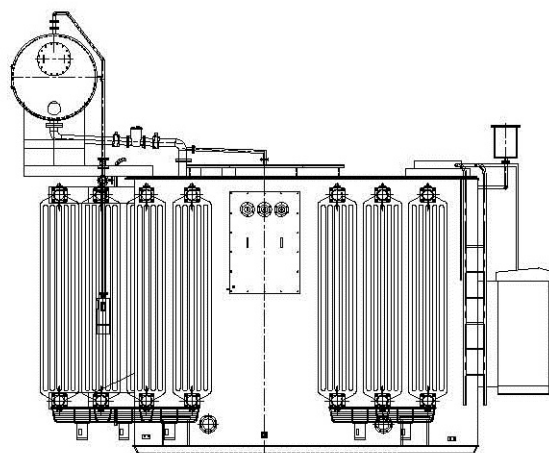

COIL & CORE

INQUIRY

Sales@hctr.co.kr

Michael@transformerprice.com

Taeyoung@hctr.co.kr

The logo for IEV, consisting of the letters 'IEV' in a bold, blue, sans-serif font. The 'V' has a stylized orange and yellow swoosh extending from its top right corner.

Republic of Korea
1593-3 Songjung-dong,
Ganseo-gu, Busan

Phone: +82 51 831 3470

Fax: +82 51 831 3477

www.hctr.co.kr

© 2013 Hanchang Transformer co.,ltd. All rights reserved. The information in this publication is provided without any express or implied representation or warranty in relation to any contract which may be entered into. Hanchang shall not be responsible for any loss or damage of whatsoever nature [including consequential loss or damage] suffered or incurred, directly or indirectly, by the reader or any other person as a result of relying on the information contained in this publication.



Quality
ISO 9001
ISO 14001