



Han Chang
Transformer



Hermetical Seal Transformer

500kVA 11KV/433V

22kV/433V

33kV/433V

www.hctr.co.kr

HAN CHANG

500kVA 11kV/22kV/33kV, 433V ONAN
HERMETICAL SEAL TRANSFORMER

SPECIFICATION

Service area	Outdoor, Indoor
Applicable standard	IEC 60076
Final paint color	Munsell #7.0BG
Insulating oil	Mineral
Rated capacity	500 kVA
Phase/Rated frequency	3P / 60, 50Hz
Rated voltage HV/LV	33 kV / 433 V 22 kV / 433 V 11 kV / 433 V
Tap voltage	5 steps 2.5%
Tap changing method	Off Load Tap Changer
Connection or polarity	Dyn11
Cooling method	ONAN
Sound level	56dB



Features

Four side Corrugated fin tank

Compact design

Pressure Relief Device

Sealed type

HAN CHANG

500kVA 11kV/22kV/33kV, 433V ONAN HERMETICAL SEAL TRANSFORMER

SIZE, 11kV/433V

Length	1520 mm
Width	950 mm
Height	1370 mm

WEIGHT, 11kV/433V

Oil	560 liter
Tank	1446 kG
Total	1950 kG

SIZE, 22kV/433V

Length	1520 mm
Width	950 mm
Height	1370 mm

WEIGHT, 22kV/433V

Oil	560 liter
Tank	1446 kG
Total	1950 kG



SIZE, 33kV/433V

Length	1520 mm
Width	950 mm
Height	1370 mm

WEIGHT, 33kV/433V

Oil	560 liter
Tank	1446 kG
Total	1950 kG

OUT LINE

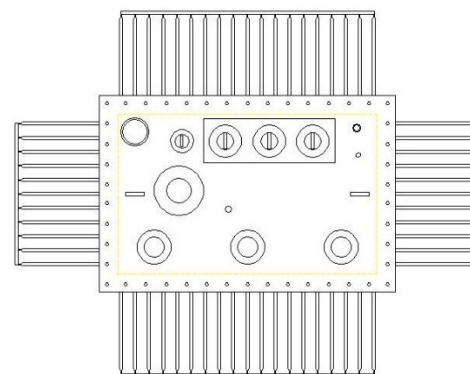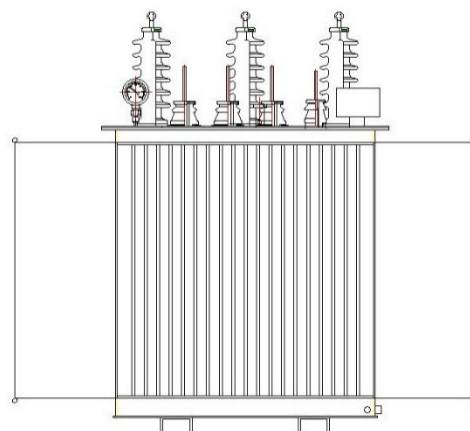

IN TANK



INQUIRY

Michael@transformerprice.com

Taeyoung@hctr.co.kr

Sales@hctr.co.kr



Republic of Korea
1593-3 Songjung-dong,
Ganseo-gu, Busan

Phone: +82 51 831 3470

Fax: +82 51 831 3477

www.hctr.co.kr

© 2013 Hanchang Transformer co.,ltd. All rights reserved. The information in this publication is provided without any express or implied representation or warranty in relation to any contract which may be entered into. Hanchang shall not be responsible for any loss or damage of whatsoever nature [including consequential loss or damage] suffered or incurred, directly or indirectly, by the reader or any other person as a result of relying on the information contained in this publication.



Quality
ISO 9001
ISO 14001